




Stego® Tape

STEGO INDUSTRIES, LLC



Vapor Retarders
07260, 03300

1. Product Name

Stego Tape

2. Manufacturer

Stego Industries, LLC
216 Avenida Fabricante, Suite 101
San Clemente, CA 92672
Sales, Technical Assistance
Ph: (877) 464-7834
Fx: (949) 257-4113
www.stegoindustries.com

3. Product Description

USES: Stego Tape is a low permeance tape designed for protective sealing, hanging, seaming, splicing, and patching applications where a highly conformable material is required. It has been engineered to bond specifically to Stego Wrap Vapor Retarder/Barrier, making it ideal for sealing Stego Wrap seams and penetrations.

COMPOSITION: Stego Tape is composed of a high-density polyethylene film and a rubber-based, pressure-sensitive adhesive.

SIZE: Stego Tape comes in four-inch-wide by 180-foot-long rolls. Stego Tape ships 12 rolls in a case.

4. Technical Data

APPLICABLE STANDARDS:
American Society for Testing & Materials (ASTM)

- ASTM D 1000 Standard Test Method for Pressure-Sensitive Adhesive-Coated Tapes Used for Electrical and Electronic Applications
- ASTM E 1643 - Standard Practice for Installation of Water Vapor Retarders Used in Contact with Earth or Granular Fill under Concrete Slabs

5. Installation


SEAMS:
Overlap Stego Wrap six inches and seal with Stego Tape. Make sure the area of adhesion is free from dust, dirt and moisture to allow maximum adhesion of the pressure sensitive tape.

PIPE BOOTS:

- 1) Cut a piece of Stego Wrap.
Width: minimum 12 inches
Length: one and one-half times the pipe circumference
- 2) With scissors, cut slits half the width of the film.
- 3) Wrap boot around pipe and tape onto pipe, completely taping the base to Stego Wrap using Stego Tape.

Stego Tape should be installed above 40 °F

NOTE: See Stego's installation instructions for complete instructions and detailed drawings. Each user should make their own tests to determine the products suitability for their own intended use and shall assume all risks and liability in connection therewith.

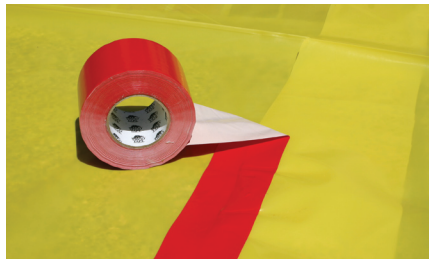

6. Availability & Cost

Stego Tape is available nationally via building supply distributors. For current cost information, contact your local Stego distributor or Stego Industries' sales department.

7. Warranty

Stego Industries, LLC believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego Industries does not guarantee results from the use of the information provided and disclaims all liability from any loss or damage. No warranty, express or implied, is given as to the merchantability, fitness for a particular purpose, or otherwise with respect to the products referred to.

8. Maintenance

None required.

9. Technical Services

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego Industries' technical assistance department or by visiting the website.

10. Filing Systems

- Stego Industries' website
- Buildsite

TABLE 1: PHYSICAL PROPERTIES OF STEGO TAPE

| Property | Stego Tape |
|------------------------|-------------------|
| Total Thickness | 9 mils |
| Permeance | 0.23 perms |
| Tensile Strength | 27 lbs./in. width |
| Elongation (at break) | 100% |
| Adhesion | 50-oz./in. width |
| Ultraviolet Resistance | Excellent |

