



STEGO® PRE-CUT PIPE BOOTS


A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00, 03 30 00 | VERSION: FEB 18, 2020

1. PRODUCT NAME

STEGO PRE-CUT PIPE BOOTS

2. MANUFACTURER

Stego Industries, LLC
 216 Avenida Fabricante, Suite 101
 San Clemente, CA 92672
 Sales, Technical Assistance
 Ph: (877) 464-7834
 contact@stegoindustries.com
 www.stegoindustries.com

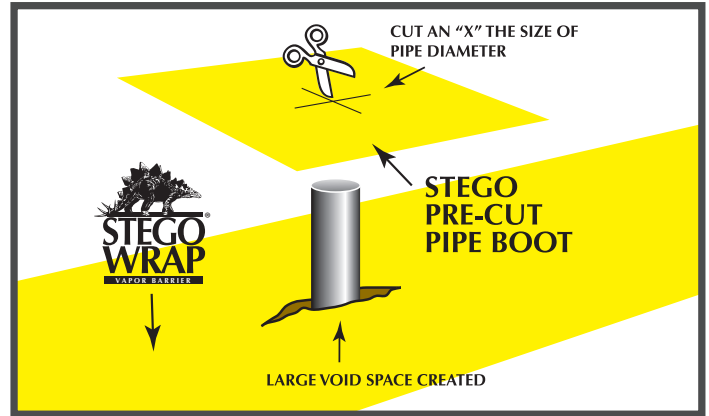

3. PRODUCT DESCRIPTION

USES: Stego Pre-Cut Pipe Boots are used to seal around permanent penetrations in Stego® Wrap.

COMPOSITION: Stego Pre-Cut Pipe Boots are made from Stego Wrap Vapor Barrier (15-mil), and therefore are manufactured from only high grade prime, virgin, polyolefin resins.

SIZE: Stego Pre-Cut Pipe Boots are 18" x 18" and 15 mil thick. Stego Pre-Cut Pipe Boots ship 10 packs of 25 in a case (250 boots per case).

4. TECHNICAL DATA

TABLE 1: PHYSICAL PROPERTIES OF STEGO PRE-CUT PIPE BOOTS

PROPERTY	TEST	RESULTS
Under Slab Vapor Retarders	ASTM E1745 Class A, B & C- Standard Specification for Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs	Exceeds Class A, B & C
Water Vapor Permeance	ASTM F1249 – Test Method for Water Vapor Transmission Rate Through Plastic Film and Sheeting Using a Modulated Infrared Sensor	0.0086 perms
Permeance After Conditioning [ASTM E1745 Sections 7.1.2 - 7.1.5]	ASTM E154 Section 8, F1249 – Permeance after wetting, drying, and soaking ASTM E154 Section 11, F1249 – Permeance after heat conditioning ASTM E154 Section 12, F1249 – Permeance after low temperature conditioning ASTM E154 Section 13, F1249 – Permeance after soil organism exposure	0.0098 perms 0.0091 perms 0.0097 perms 0.0095 perms
Puncture Resistance	ASTM D1709 – Test Method for Impact Resistance of Plastic Film by Free-Falling Dart Method	2,266 grams
Tensile Strength	ASTM D882 – Test Method for Tensile Properties of Thin Plastic Sheeting	70.6 lbf/in
Thickness		15 mil
Pipe Boot Dimensions		width x length: 18" x 18"

Note: perm unit = grains/(ft²*hr*in-Hg)

5. INSTALLATION

UNDER SLAB: Cut an "X" the size of the pipe diameter in the center of the Pre-Cut Pipe Boot and slide tightly over pipe. Tape all sides of the pipe boot with Stego® Tape. Seal around the base of the pipe using Stego Tape and/or Stego® Mastic.

For additional information, please refer to Stego's complete installation instructions.

Continued...

Note – legal notice on page 2.

STEGO® PRE-CUT PIPE BOOTS

A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00, 03 30 00 | VERSION: FEB 18, 2020

6. AVAILABILITY & COST

Stego Pre-Cut Pipe Boots are available through our network of building supply distributors. For current cost information, contact your local Stego distributor or Stego Industries' Sales Representative.

7. WARRANTY

Stego Industries, LLC believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego Industries does not guarantee results from the use of the information provided herein. Stego Industries, LLC does offer a limited warranty on Stego Wrap. Please see www.stegoindustries.com/legal.

8. MAINTENANCE

None required.

9. TECHNICAL SERVICES

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego Industries or by visiting the website.

Email: contact@stegoindustries.com

Contact Number: (877) 464-7834

Website: www.stegoindustries.com

10. FILING SYSTEMS

- www.stegoindustries.com



(877) 464-7834 | www.stegoindustries.com

DATA SHEETS ARE SUBJECT TO CHANGE. FOR MOST CURRENT VERSION, VISIT WWW.STEGOINDUSTRIES.COM