



DRAGO™ WRAP SOIL GAS RETARDER


A STEGO INDUSTRIES, LLC INNOVATION | VAPOUR RETARDERS 07 26 00, 03 30 00 | VERSION: 4 FEB, 2025

1. PRODUCT NAME

DRAGO WRAP SOIL GAS RETARDER

2. MANUFACTURER

Stego™ Industries, LLC
216 Avenida Fabricante, Suite 101
San Clemente, CA 92672 USA
Sales, Technical Assistance
Ph: +1 (877) 464-7834
international@stegoindustries.com
stegoindustries.com

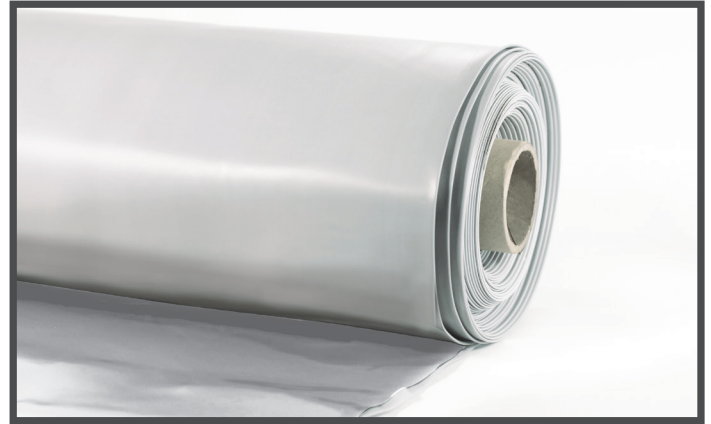

3. PRODUCT DESCRIPTION

USES: Drago Wrap Soil Gas Retarder is a high-performance under-slab gas retarder.

COMPOSITION: Drago Wrap Soil Gas Retarder is a multi-layer plastic extrusion manufactured with only high grade, prime, virgin, polyolefin resins.

ENVIRONMENTAL FACTORS: Drago Wrap Soil Gas Retarder is a pre-emptive solution for contaminated sites with trace amounts of VOCs.

4. TECHNICAL DATA

TABLE 4.1: PHYSICAL PROPERTIES OF DRAGO WRAP SOIL GAS RETARDER

PROPERTY	TEST	RESULTS	
Under Slab Vapour Retarders	ASTM E1745 – Standard Specification for Water Vapour Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs	ASTM E1745 Compliant	
		Permeance Units (perms): ng/(m ² *s*Pa) gr/(ft ² *hr*in-Hg)	
Water Vapour Permeance	ASTM F1249 – Test Method for Water Vapour Transmission Rate Through Plastic Film and Sheeting Using a Modulated Infrared Sensor	0.47	0.0081
Permeance After Conditioning (ASTM E1745 Sections 7.1.2 - 7.1.5)	ASTM E154 Section 8, F1249 – Permeance after wetting, drying, and soaking ASTM E154 Section 11, F1249 – Permeance after heat conditioning ASTM E154 Section 12, F1249 – Permeance after low temperature conditioning ASTM E154 Section 13, F1249 – Permeance after soil organism exposure	0.55 0.51 0.47 0.55	0.0096 0.0089 0.0082 0.0096
Push-Through Puncture	ASTM D4833 – Test Method for Index Puncture Resistance of Geotextiles, Geomembranes, and Related Products	202.7 newtons	
Tensile Strength	ASTM D882 – Test Method for Tensile Properties of Thin Plastic Sheeting	11.03 kN/m	
Benzene Permeation Coefficient	Aqueous Phase Film Permeation Testing	<1.1 x 10 ⁻¹⁰ m ² /second	
Toluene Permeation Coefficient	Aqueous Phase Film Permeation Testing	<1.4 x 10 ⁻¹⁰ m ² /second	
Ethylbenzene Permeation Coefficient	Aqueous Phase Film Permeation Testing	<2.0 x 10 ⁻¹⁰ m ² /second	
M&P-Xylenes Permeation Coefficient	Aqueous Phase Film Permeation Testing	<2.0 x 10 ⁻¹⁰ m ² /second	
O-Xylene Permeation Coefficient	Aqueous Phase Film Permeation Testing	<1.6 x 10 ⁻¹⁰ m ² /second	
TCE Permeation Coefficient	Aqueous Phase Film Permeation Testing	<1.3 x 10 ⁻¹⁰ m ² /second	
PCE Permeation Coefficient	Aqueous Phase Film Permeation Testing	<1.4 x 10 ⁻¹⁰ m ² /second	
Methane Transmission Rate	ASTM D1434 – Test Method for Determining Gas Permeability Characteristics of Plastic Film and Sheeting	103 ml(STP)/m ² *day)**	
Radon Diffusion Coefficient	ISO11665-13	6.0 x 10 ⁻¹² m ² /second	
Thickness		0.50 mm (20 mil)	
Roll Dimensions		width x length area	4.3 m x 32.0 m (14' x 105') 136 m ² (1,470 ft ²)
Roll Weight		68 kg (150 lb)	

** GTR = Gas Transmission Rate

Continued...

Note – legal notice on page 2.

DRAGO™ WRAP SOIL GAS RETARDER

A STEGO INDUSTRIES, LLC INNOVATION | VAPOUR RETARDERS 07 26 00, 03 30 00 | VERSION: 4 FEB, 2025

5. INSTALLATION

UNDER SLAB: Unroll Drago Wrap over a tamped aggregate, sand, or earth base. Overlap all seams a minimum of 300 mm (12") and tape using DragoSeal™ Tape. All penetrations must be sealed using a combination of Drago Wrap and Drago Accessories.

Review Drago Wrap's complete installation instructions prior to installation.

6. AVAILABILITY & COST

Drago Wrap is available through our network of building supply distributors. For current cost information, contact your local Drago distributor or Stego™ Sales Representative.

7. WARRANTY

Stego believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego does not guarantee results from the use of the information provided herein. Stego does offer a limited warranty on Drago Wrap. Please see stegoindustries.com/legal

8. MAINTENANCE AND STORAGE

Maintenance: Inspect after installation. Repair visible damage with DragoSeal Tape or recommended accessories.

Storage and Handling: Store in original packaging in a cool, dry place. Handle with care to avoid damage.

Please refer to the Safety Data Sheet (SDS) for detailed safety, storage, and handling procedures.

9. TECHNICAL SERVICES

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego or by visiting the website.

mail: international@stegoindustries.com

Contact Number: +1 (877) 464-7834

Website: stegoindustries.com

10. FILING SYSTEMS: stegoindustries.com

+1 (877) 464-7834 | stegoindustries.com

DATA SHEETS ARE SUBJECT TO CHANGE. FOR MOST CURRENT VERSION, VISIT [STEGOINDUSTRIES.COM](https://stegoindustries.com)

