



STEGO® WRAP 15-MIL VAPOR BARRIER


A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00, 03 30 00 | VERSION: DEC 8, 2022

1. PRODUCT NAME

STEGO WRAP 15-MIL VAPOR BARRIER

2. MANUFACTURER

Stego Industries, LLC
 216 Avenida Fabricante, Suite 101
 San Clemente, CA 92672
 Sales, Technical Assistance
 Ph: (877) 464-7834
 contact@stegoindustries.com
 stegoindustries.com

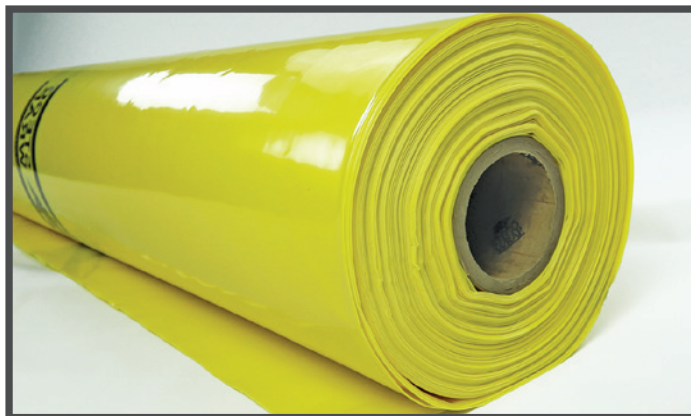

3. PRODUCT DESCRIPTION

USES: Stego Wrap 15-Mil Vapor Barrier is used as a below-slab vapor barrier.

COMPOSITION: Stego Wrap 15-Mil Vapor Barrier is a multi-layer plastic extrusion manufactured with only high grade prime, virgin, polyolefin resins.

ENVIRONMENTAL FACTORS: Stego Wrap 15-Mil Vapor Barrier can be used in systems for the control of soil gases (radon, methane), soil poisons (oil by-products) and sulfates.

4. TECHNICAL DATA

TABLE 1: PHYSICAL PROPERTIES OF STEGO WRAP 15-MIL VAPOR BARRIER

PROPERTY	TEST	RESULTS
Under Slab Vapor Retarders	ASTM E1745 Class A, B & C- Standard Specification for Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs	Exceeds Class A, B & C
Water Vapor Permeance	ASTM F1249 – Test Method for Water Vapor Transmission Rate Through Plastic Film and Sheeting Using a Modulated Infrared Sensor	0.0086 perms
Permeance After Conditioning (ASTM E1745 Sections 7.1.2 - 7.1.5)	ASTM E154 Section 8, F1249 – Permeance after wetting, drying, and soaking ASTM E154 Section 11, F1249 – Permeance after heat conditioning ASTM E154 Section 12, F1249 – Permeance after low temperature conditioning ASTM E154 Section 13, F1249 – Permeance after soil organism exposure	0.0098 perms 0.0091 perms 0.0097 perms 0.0095 perms
Methane Transmission Rate	ASTM D1434 – Standard Test Method for Determining Gas Permeability Characteristics of Plastic Film and Sheeting	192.8 GTR* (mL(STP)/m ² *day)
Radon Diffusion Coefficient	K124/02/95	8.8 x 10 ⁻¹² m ² /second
Puncture Resistance	ASTM D1709 – Test Method for Impact Resistance of Plastic Film by Free-Falling Dart Method	2,266 grams
Tensile Strength	ASTM D882 – Test Method for Tensile Properties of Thin Plastic Sheeting	70.6 lbf/in
Thickness		15 mil
Roll Dimensions		width x length: area: 14' x 140' 1,960 ft ²
Roll Weight		147 lb

Note: perm unit = grains/(ft*hr*in-Hg)

*GTR = Gas Transmission Rate

Continued...

Note – legal notice on page 2.

STEGO® WRAP 15-MIL VAPOR BARRIER

A STEGO INDUSTRIES, LLC INNOVATION | VAPOR RETARDERS 07 26 00, 03 30 00 | VERSION: DEC 8, 2022

5. INSTALLATION

UNDER SLAB: Unroll Stego Wrap 15-Mil Vapor Barrier over an aggregate, sand or tamped earth base. Overlap all seams a minimum of 6 inches and tape using Stego® Tape or Stego® Crete Claw® Tape. All penetrations must be sealed using a combination of Stego Wrap and Stego Accessories.

For additional information, please refer to Stego's complete installation instructions.

6. AVAILABILITY & COST

Stego Wrap 15-Mil Vapor Barrier is available through our network of building supply distributors. For current cost information, contact your local Stego distributor or Stego Industries' Sales Representative.

7. WARRANTY

Stego Industries, LLC believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego Industries does not guarantee results from the use of the information provided herein. Stego Industries, LLC does offer a limited warranty on Stego Wrap. Please see stegoindustries.com/legal

8. MAINTENANCE

None required.

9. TECHNICAL SERVICES

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego Industries or by visiting the website.

Email: contact@stegoindustries.com

Contact Number: (877) 464-7834

Website: stegoindustries.com

10. FILING SYSTEMS: stegoindustries.com

(877) 464-7834 | stegoindustries.com

DATA SHEETS ARE SUBJECT TO CHANGE. FOR MOST CURRENT VERSION, VISIT STEGOINDUSTRIES.COM

