



DRAGO® WRAP VAPOR INTRUSION BARRIER


A STEGO TECHNOLOGY, LLC INNOVATION | VAPOR RETARDERS 07 26 00, 03 30 00 | VERSION: 06/23/2017

1. PRODUCT NAME

DRAGO WRAP VAPOR INTRUSION BARRIER

2. MANUFACTURER

c/o Stego® Industries, LLC*
216 Avenida Fabricante, Suite 101
San Clemente, CA 92672
Sales, Technical Assistance
Ph: (877) 464-7834
Fx: (949) 257-4113
www.stegoindustries.com

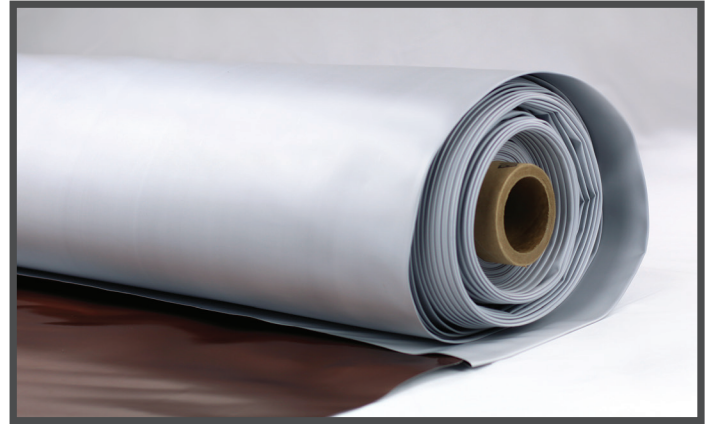

3. PRODUCT DESCRIPTION

USES: Drago Wrap is specifically engineered to attenuate volatile organic compounds (VOCs) and serve as a below-slab moisture vapor barrier.

COMPOSITION: Drago Wrap is a multi-layered plastic extrusion that combines uniquely designed materials with only high grade, prime, virgin resins.

ENVIRONMENTAL FACTORS: Drago Wrap can be used in systems for the control of various VOCs including hydrocarbons, chlorinated solvents, radon, methane, soil poisons, and sulfates.

4. TECHNICAL DATA

TABLE 4.1: PHYSICAL PROPERTIES OF DRAGO WRAP VAPOR INTRUSION BARRIER

PROPERTY	TEST	RESULTS
Under Slab Vapor Retarders	ASTM E1745 – Standard Specification for Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs	ASTM E1745 Compliant
Water Vapor Permeance	ASTM F1249 – Test Method for Water Vapor Transmission Rate Through Plastic Film and Sheeting Using a Modulated Infrared Sensor	0.0069 perms [gr/(ft ² *hr*in-Hg)]
Push-Through Puncture	ASTM D4833 – Test Method for Index Puncture Resistance of Geotextiles, Geomembranes, and Related Products	183.9 Newtons
Tensile Strength	ASTM D882 – Test Method for Tensile Properties of Thin Plastic Sheeting	53.5 lbf/in
Permeance After Conditioning (ASTM E1745 Sections 7.1.2 - 7.1.5)	ASTM E154 Section 8, F1249 – Permeance after wetting, drying, and soaking ASTM E154 Section 11, F1249 – Permeance after heat conditioning ASTM E154 Section 12, F1249 – Permeance after low temperature conditioning ASTM E154 Section 13, F1249 – Permeance after soil organism exposure	0.0073 perms 0.0070 perms 0.0062 perms 0.0081 perms
Hydrocarbon Attenuation Factors	Contact Stego Industries' Technical Department	
Chlorinated Solvent Attenuation Factors	Contact Stego Industries' Technical Department	
Methane Transmission Rate	ASTM D1434 – Test Method for Determining Gas Permeability Characteristics of Plastic Film and Sheeting	7.0 GTR (mL(STP)/m ² *day)
Radon Diffusion Coefficient	K124/02/95	9.8 x 10 ⁻¹⁴ m ² /second
Thickness		20 mils
Roll Dimensions		14' x 105' or 1,470 ft ²
Roll Weight		150 lbs

Continued...

Note – legal notice on page 2.

DRAGO® WRAP VAPOR INTRUSION BARRIER

A STEGO TECHNOLOGY, LLC INNOVATION | VAPOR RETARDERS 07 26 00, 03 30 00 | VERSION: 06/23/2017

5. INSTALLATION

UNDER SLAB: Unroll Drago Wrap over a tamped aggregate, sand, or earth base. Overlap all seams a minimum of 12 inches and tape using Drago® Tape. All penetrations must be sealed using a combination of Drago Wrap and Drago Accessories.

Review Drago Wrap's complete installation instructions prior to installation.

6. AVAILABILITY & COST

Drago Wrap is available nationally through our network of building supply distributors. For current cost information, contact your local Drago distributor or Stego Industries' Sales Representative.

7. WARRANTY

Stego Industries, LLC believes to the best of its knowledge, that specifications and recommendations herein are accurate and reliable. However, since site conditions are not within its control, Stego Industries does not guarantee results from the use of the information provided and disclaims all liability from any loss or damage. Stego Technology, LLC does offer a limited warranty on Drago Wrap. Please see www.stegoindustries.com/legal.

8. MAINTENANCE

Store Drago Wrap in a dry and temperate area.

9. TECHNICAL SERVICES

Technical advice, custom CAD drawings, and additional information can be obtained by contacting Stego Industries or by visiting the website.

Contact Number: (877) 464-7834

Website: www.stegoindustries.com

10. FILING SYSTEMS

- www.stegoindustries.com
- Buildsite

(877) 464-7834 | www.stegoindustries.com

DATA SHEETS ARE SUBJECT TO CHANGE. FOR MOST CURRENT VERSION, VISIT WWW.STEGOINDUSTRIES.COM

